MATERIALS AND FINISH SCHEDULE

ROOM NAME OR AREA	FLOOR MATERIAL: CARPET	HARDWOOD	TILE	VINYL	BRICK PAVERS	CONCRETE	P.T. DECKING	FLOOR FIN.: FACTORY	STAIN	SMOOTH TROWELED	BROOMED FINISH	BASE MAT.: 4¼" MOULDED WOOD	6" WOOD/SHOE & CAP	TILE	BASE FIN.: FACTORY	PAINT	STAIN	WALLS MATERIAL: DRYWALL	CONCRETE BLOCK	TILE	WOOD (PANEL/SIDING)	BRICK	WALLS FIN.: FACTORY	PAINT	STAIN	WALLCOVERING	CEILING MAT.: DRYWALL	V-JOINT WOOD (1X4)	PLYWOOD	LAY-IN ACOUSTICAL	VINYL SOFFIT-CEILING	CEILING FIN.: FACTORY	PAINT	STAIN	TEXTURED	CEILING HEIGHT	TRIM DR/MANDO CASINGS: 1X4 FLAT	2-1/2" MOULDED	3-1/4" MOULDED	CEILING MOULDING: 4" CROWN MOULD	6" CROWN MOULD	W/ INVERTED BASE	MISC.: CHAIR RAIL	PANEL MOULDING	FIN.: PAINT	STAIN	NOTES
FOYER			X					X					X			X		X						X			X						X				12'			X		X	X			X		
STUDY		X							X				X			X		X						X			X						X				VAULT			X		X				X		
DINING ROOM		X							X				X			X		X						X			X						X				12'			X		X				X		
LIVING ROOM			X					X					X			X		X						X			X						X				12'			X			X	X		X		
KITCHEN			X					X					X			X		X						X			X						X				9'			X	X					X		
BREAKFAST			X					X					X			X		X						X			X						X				9'			X	X					X		
FAMILY ROOM			X					X					X			X		X						X			X						X				9'			X	X					X		BRICK FIREPLACE, REFER TO ELEVATION 1/A-7 BELOW.
HALLS			X					X					X			X		X						X			X						X				9'			X	X					X		
MASTER BEDROOM		X							X				X			X		X						X			X						X				TRAY			X		X				X		TRAY CEILING, REFER TO SECTION 2/A-2. FIREPLACE, REFER TO ELEVATION 2/A-7 BELOW.
WALK-IN CLOSETS	X							X				X			X			X						X			X						X				9'			X						X		
MASTER BATH			X					X						X		X		X						X			X						X				9'			X		X				X		TILE SHOWER AND TUB PLATFORM WITH BACKSPLASH
BEDROOM 2	X							X				X				X		X						X			X						X				9'			X		X				X		
BATH 2			X					X						X		X		X						X			X						X				9'			X		X				X		
BEDROOM 3	X							X				X				X		X						X			X						X				9'			X		X				X		
LAUNDRY			X					X						X		X		X						X			X						X				9'			X						X		
POWDER ROOM			X					X						X		X		X						X			X						X				9'			X		X				X		
COAT CLOSET			X					X				X				X		X						X			X						X				9'			X						X		
GARAGE						X		X				X				X		X						X			X						X				10'			X						X		
PORCH					X			X				N/A				N/A					X		X	X							X	X					12'	N/A								N/A		
COVERED PORCH					X			X				N/A				N/A					X		X	X							X	X					9'	N/A								N/A		
PATIO					X			X				N/A				N/A					X		X	X			N/A					X					N/A	N/A								N/A		
BASEMENT																																																	
REC. ROOM	X							X				X				X		X						X						X			X				9'			X		X				X		CERAMIC TILE AT WET BAR. FIREPLACE, REFER TO ELEVATION 3/A-7 BELOW
HALL	X							X				X				X		X						X						X			X				9'			X		X				X		
BEDROOM 4	X							X				X				X		X						X						X			X				8'			X		X				X		
BATH 3			X					X				X				X		X						X						X			X				8'			X		X				X		
BASEMENT					X					X		X				X		X	X					X			N/A						N/A				9.5'	N/A								N/A		INSTALL BASE ONLY AT STUD WALLS. PAINT ONLY BASE AND DRYWALL

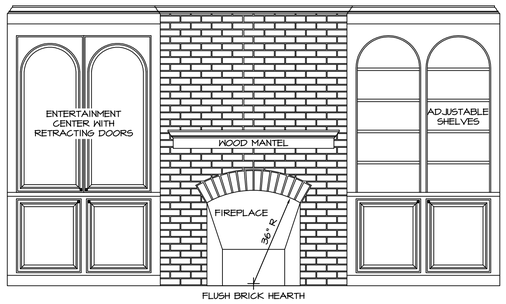

1 A-7 **ELEVATION** SCALE: 1/2"=1'-0"
FAMILY ROOM FIREPLACE



2 A-7 **ELEVATION** SCALE: 1/2"=1'-0"
MASTER BEDROOM FIREPLACE

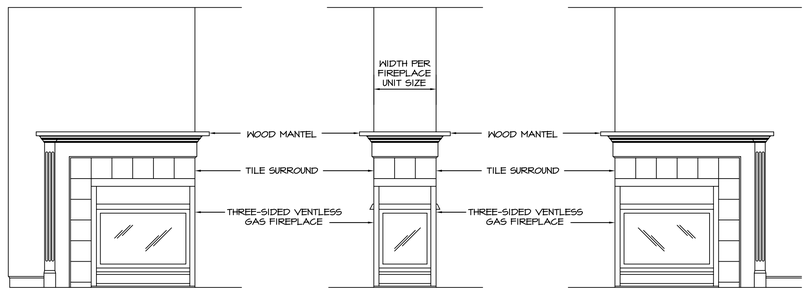

3 A-7 **ELEVATIONS** SCALE: 1/2"=1'-0"
REC. ROOM FIREPLACE

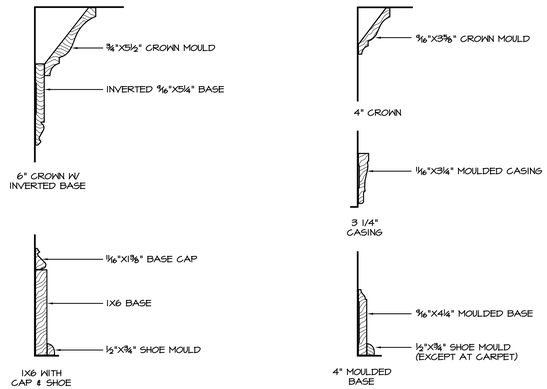

4 A-7 **TRIM DETAILS** SCALE: 3"=1'-0"